


Bright Green Low Power LED Tape

Bright Green Low Power LED Tape is a high quality flexible LED strip, the LEDs are strictly bin controlled for consistent colour temperature.

All versions of the tape use high quality 3M self-adhesive backing. The IP65 version of the tape has a high quality polyurethane coating, ensuring that the tape does not go brittle or discolour.

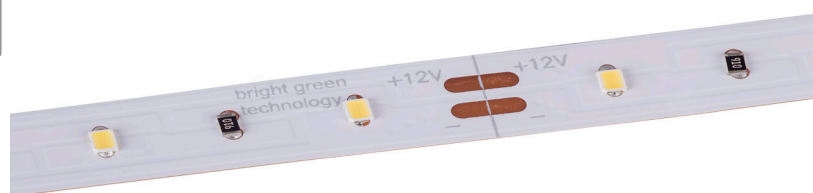


Product Range

Product code	Colour	Colour temp	Lumens/ metre	Voltage	Power/ metre	LEDs/ metre	IP rating	LED chip	CRI
FL-LPCW-2216-20	Cool white	6000K	480	12V	4.8W	60	20	SMD 2216	>90
FL-LPCW-2216-65	Cool white	6000K	480	12V	4.8W	60	65	SMD 2216	>90
FL-LPWW-2216-20	Warm white	3000K	480	12V	4.8W	60	20	SMD 2216	>90
FL-LPWW-2216-65	Warm white	3000K	480	12V	4.8W	60	65	SMD 2216	>90
FL-LPR-20*	Red	620nm	-	12V	4.8W	60	20	SMD 3528	>80
FL-LPG-20*	Green	515nm	-	12V	4.8W	60	20	SMD 3528	>80
FL-LPB-20*	Blue	465nm	-	12V	4.8W	60	20	SMD 3528	>80
FL-LPR-65*	Red	620nm	-	12V	4.8W	60	65	SMD 3528	>80
FL-LPG-65*	Green	515nm	-	12V	4.8W	60	65	SMD 3528	>80
FL-LPB-65*	Blue	465nm	-	12V	4.8W	60	65	SMD 3528	>80

*Non stock part

Dimensions

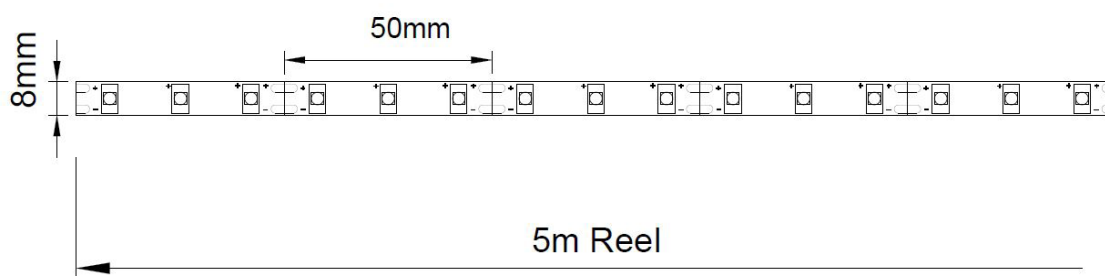

Tel +44 (0) 1932 355221 Email info@brightgreentechnology.com
 Find out more at www.brightgreentechnology.com
 or buy online at www.brightgreendirect.com

© 2017 Bright Green Technology Limited V8.0



Bright Green Low Power LED Tape

Electrical Connection

Connect to a 12 Volt power supply in maximum 5 metre lengths in series, for longer lengths connect in parallel.

Operation Notes

Operating temperature range: -20° to 45° C.

Connection

Installation should be carried out by suitably qualified personnel.

