


Bright Green Ultra Low/Low Power LED Tape

Bright Green Ultra Low and Low Power LED Tape is a flexible LED strip, strictly bin controlled for a consistent colour temperature. All versions use high quality 3M self-adhesive backing.



12V

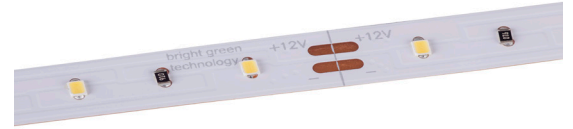


STRICT BIN CONTROL for consistent colour temperature

Product Range

Product code	Colour	Colour Temp	Lumens/ metre	Voltage	Power/ metre	LEDs/ metre	IP Rating	LED Chip	CRI
FL-LPCW-2216-20	Cool White	6500K	417	12V	4.8W	60	20	SMD2216	>90
FL-LPCW-2216-65*	Cool White	6500K	417	12V	4.8W	60	65	SMD2216	>90
FL-LPWW-2216-20	Warm White	3000K	384	12V	4.8W	60	20	SMD2216	>90
FL-LPWW-2216-65*	Warm White	3000K	384	12V	4.8W	60	65	SMD2216	>90
FL-ULP27-20	Warm White	2700K	396	12V	2.4W	80	20	SMD3040	>80
FL-ULP30-20*	Neutral White	3000K	408	12V	2.4W	80	20	SMD3040	>80
FL-ULP40-20	Neutral White	4000K	432	12V	2.4W	80	20	SMD3040	>80
FL-ULP60-20*	Cool White	6000K	432	12V	2.4W	80	20	SMD3040	>80

* Non stock part

Dimensions

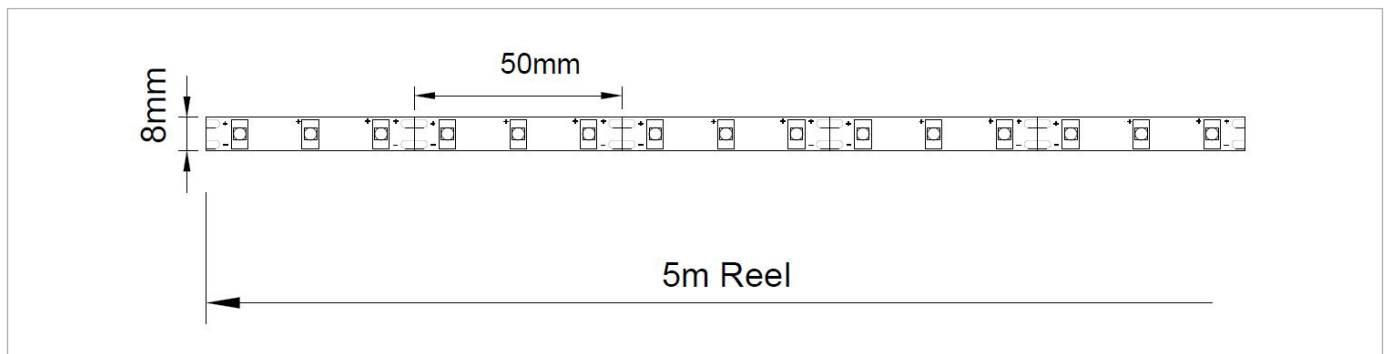

DATASHEET

Bright Green Low Power LED Tape

Electrical Connection

Connect to a 12 Volt power supply in maximum 5 metre lengths in series, for longer lengths connect in parallel.

Operation Notes

Operating temperature range: -20° to 45°C.

Connection

Installation should be carried out by suitably qualified personnel.