Bright Green

Low Power LED Tape

Bright Green Low Power LED Tape is a flexible LED strip, strictly bin controlled for a consistent colour temperature. All versions use high quality 3M selfadhesive backing. The IP65 version has a polyurethane coating, ensuring that the tape does not brittle or discolour in use.
















STRICT BIN CONTROL for consistent colour temerature

Product Range

Product code	Colour	Colour Temp	Lumens/ metre	Voltage	Power/ metre	LEDs/ metre	IP Rating	LED Chip	CRI
FL-LPCW-2216-20	Cool White	6000K	480	12V	4.8W	60	20	SMD 2216	>90
FL-LPCW-2216-65	Cool White	6000K	480	12V	4.8W	60	54	SMD 2216	>90
FL-LPWW-2216-20	Warm White	3000К	480	12V	4.8W	60	20	SMD 2216	>90
FL-LPWW-2216-65	Warm White	3000K	480	12V	4.8W	60	54	SMD 2216	>90

Dimensions

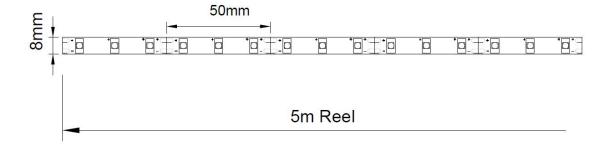

Electrical Connection

Connect to a 12 Volt power supply in maximum 5 metre lengths in series, for longer lengths connect in parallel.

Operation Notes

Operating temperature range: -20° to 45°C.

Connection

Installation should be carried out by suitably qualified personnel.

