

Bright Green Connect PXS-320-V



Features

- Supply Voltage: 90~305Vac or 127-420Vdc, 380Vac for 2 hours
- 10kV Surge Immunity
- Contactless Programmability
- PWM Output Frequency >1kHz
- 100,000 Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- 0-10V/PWM/DALI/Push (Switch)/DMX (RDM) Dimmable
- 2% Minimum Dimming Output
- Dim Off with 0.5W Standby Power (Model Dependant)
- 12V 300mA Auxillary Power (Model Dependant)
- Input Over Voltage Protection (Optional)
- ENEC/CB/CCC SELV Output
- UL Class P Version Available
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min	Output Current Max	Certification
PXS-320-V024-XYZ	90 ~ 305 Vac	320 W	24V	0	13.3A	CB/ENEC/CCC
PXS-320-V048-XYZ	90 ~ 305 Vac	320 W	48V	0	6.7A	CB/ENEC/CCC

Options List

XY=	Dimming Method	Programmable	12Vaux	Dim-off	Programming Range
Blank	-	-	-	-	-
D	0-10V	-	-	✓	-
TC	Time	✓	-	-	100-115% Vo
E	0-10V	-	✓	✓	-
EC	0-10V	✓	✓	✓	100-115% Vo
A	DALI	-	-	✓	-
M	DMX	Set Address	-	✓	-

Z = Blank, VDE cable/Class I D, VDE cable/Class II (optional) U, UL cable (optional)

Bright Green Connect PXS-320-V

Technical Data

Input Voltage	90~305Vac or 127V-420Vdc, 380Vac for 2 hours
Input Frequency	47~63Hz
Power Factor	>0.9 @ 60-100% load, refer to PF vs. Load curve
THD	<15% @ 60-100% load, refer to THD vs. Load curve
Input Current	2.9A max @ 120Vac & Full Load 1.5A max @ 220Vac & Full Load
Inrush Current	65A peak, 1.2ms duration, <0.25A2s @ 230Vac, Cold Start 70A peak, 1.3ms duration, <0.5A2s @ 277Vac, Cold Start
Leakage Current	1mA max @ 277Vac 60Hz, 0.75mA max @ 220Vac 50Hz
Input Under Voltage	Shut down and auto-recovery
Input Over Voltage	*Optional: Shutdown @ 320Vac
Surge Protection	Line to line 6kV, line to ground 10kV
Voltage Accuracy	$\pm 3\%$ Vo
Setup Time	1.2s max.
Overshoot	10% Vo max.
Output Over Current	120% Io typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto recovery when $T_c \leq 70 \pm 10^\circ\text{C}$
Operating Temperature	-40°C~+70°C; 10%RH~100%RH (No output derating. Please refer to Lifetime vs Tc curve)
Storage Temperature	-40°C~+85°C; 5%RH~100%RH
MTBF	$\geq 280,000$ hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature (refer to Lifetime vs. Tc curve)
Case Temperature	90°C max, marked on the Tc point of label
Dimensions	8.82 x 2.66 x 1.52" (body), 9.88 x 2.66 x 1.52" (end caps included) 225 x 68 x 38.5mm (body), 251 x 68 x 38.5mm (end caps included)
Net Weight	1600g
Packing	20pcs/Carton/22kg, 490 x 370 x 190mm

Notes:

Unless specified, all the test results are measured @25°C ambient

Bright Green Connect PXS-320-V


Dimming

Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	200uA	300uA	450uA
Vdim Allowed Input Voltage	-20V	-	20V
0-10V Dimming Range	2% (Vdim=1V)	Linear	100% (Vdim=9-10V)
PWM Dimming Range	2% (Duty=10%)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3V	-	10V
PWM Low	0V	-	0.6V
PWM Frequency	300Hz	-	2kHz
External PWM Controller Current Sinking Capability	300uA	-	-
DALI Interface Standard	IEC62386		
DA1, DA2 High Level	9.5	16	22.5
DA1, DA2 Low Level	-6.5	0	6.5
DA1, DA2 Current	0	-	2mA


Bright Green Connect PXS-320-V

Dimming Curve


0-10V Dimming Curve

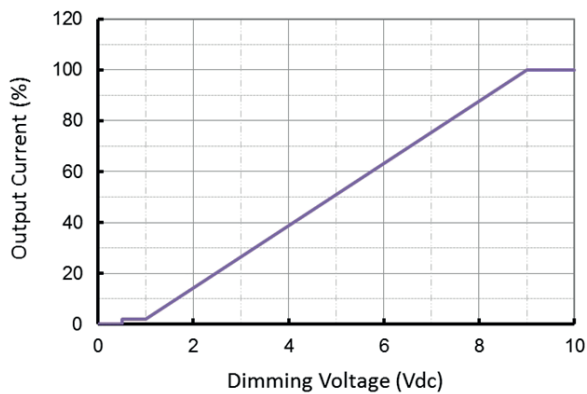

PWM Dimming Curve

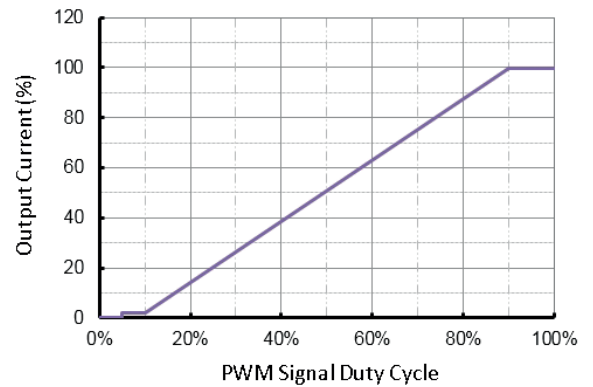

Dimming Wiring

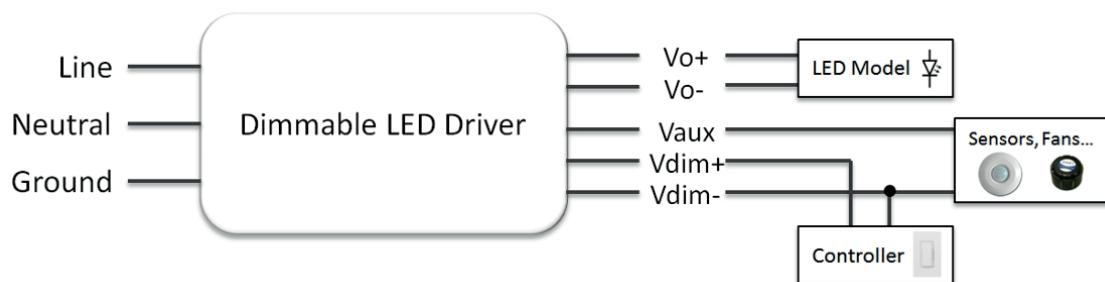


Push (Switch) Dim

Short press (50-600 ms) switches the device on or off

Long press (> 600 ms) fades the connected operating device alternately up and down (between 2 and 100%). Up and down slew rate is 20%/s.

Long push for 15s to synchronize.

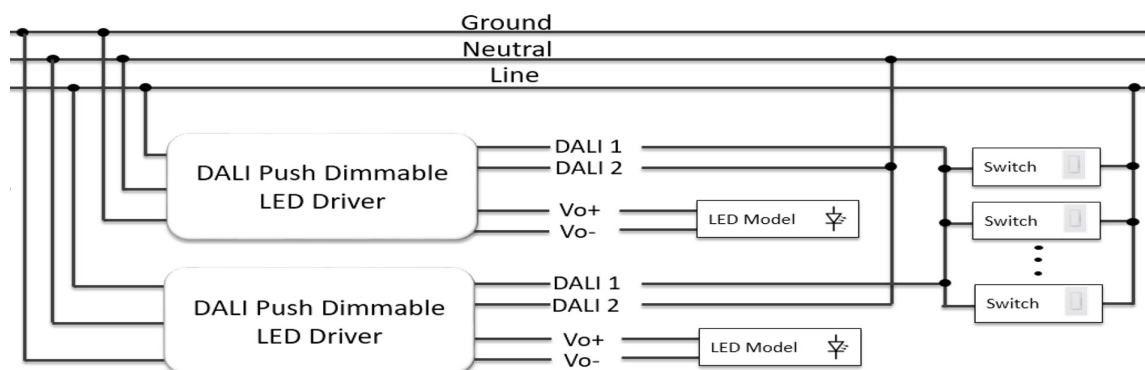


Bright Green Connect PXS-320-V

Safety/EMC Compliance


Safety Standard	Description
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
EMI Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Description
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment

Bright Green Connect PXS-320-V


Lifetime vs. Case Temperature

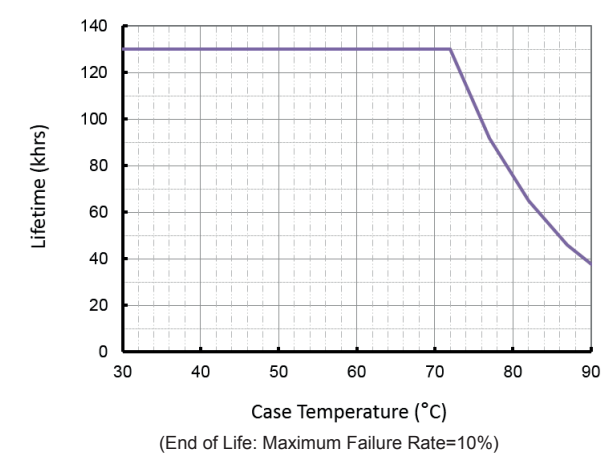


Power Factor vs. Load

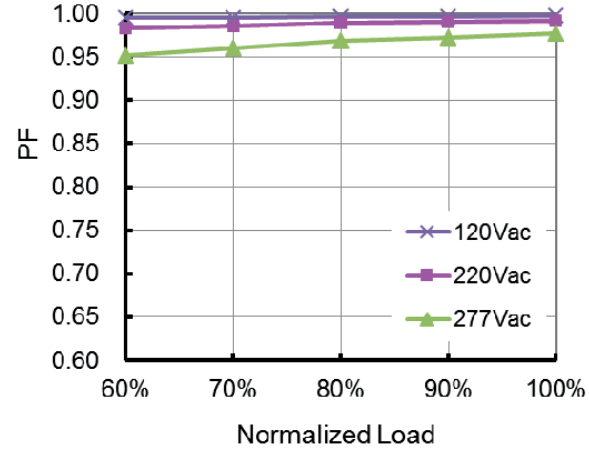

THD vs. Load

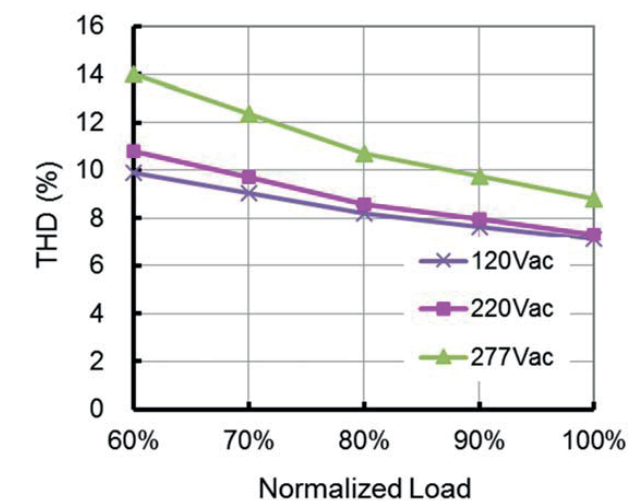


Efficiency vs. Load (24V Model)

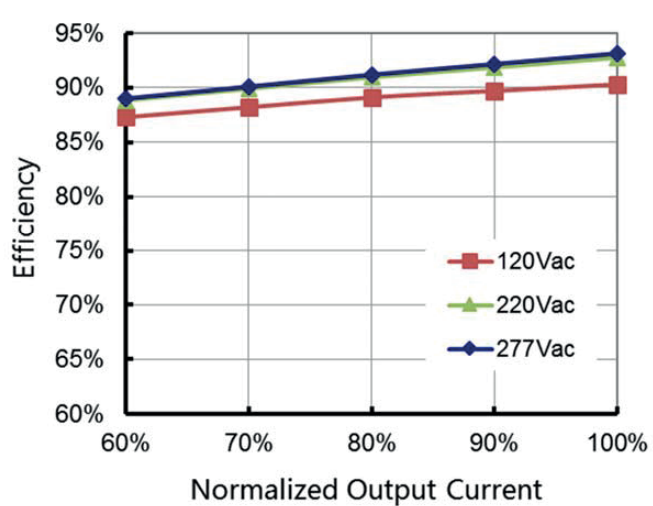


Bright Green Connect PXS-320-V

Mechanical Design

PXS-320-V048-blank/TC (48V Model)

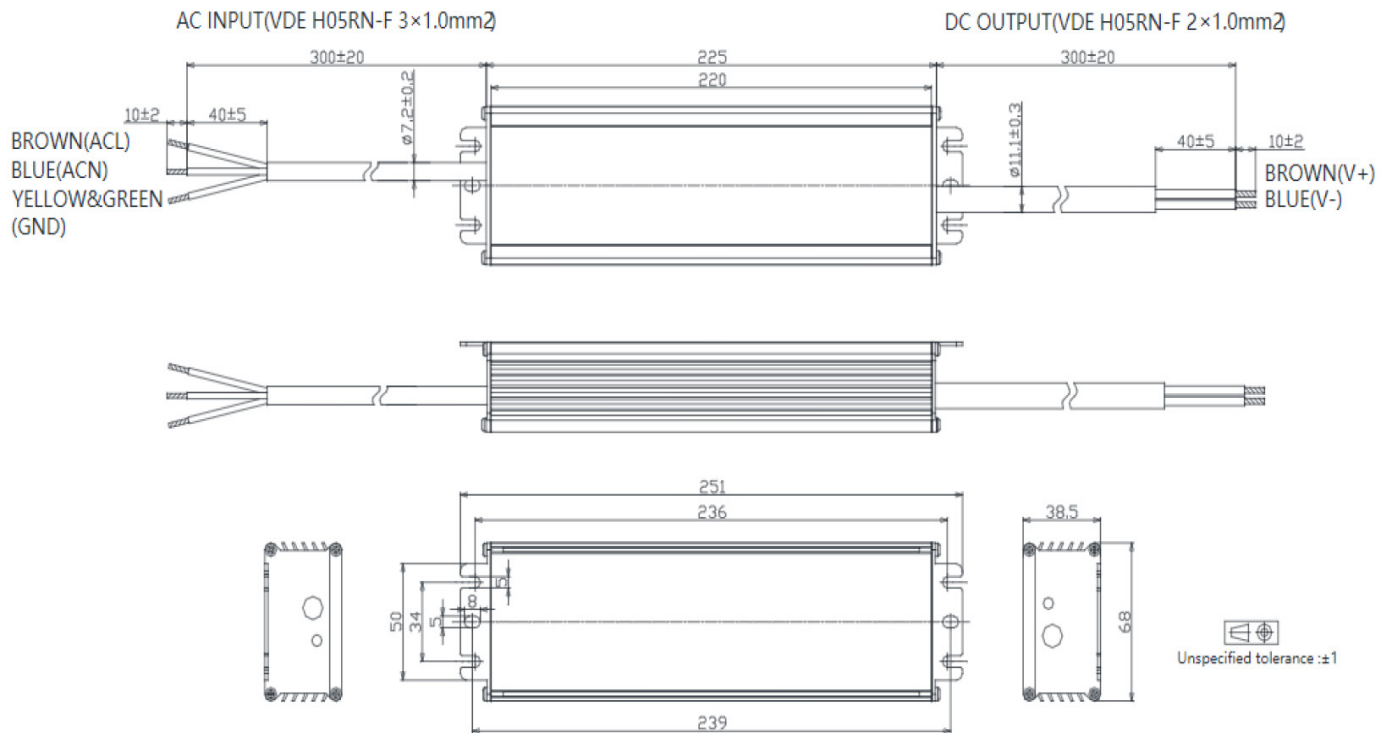


PXS-320-V024-blank/TC (24V Model)

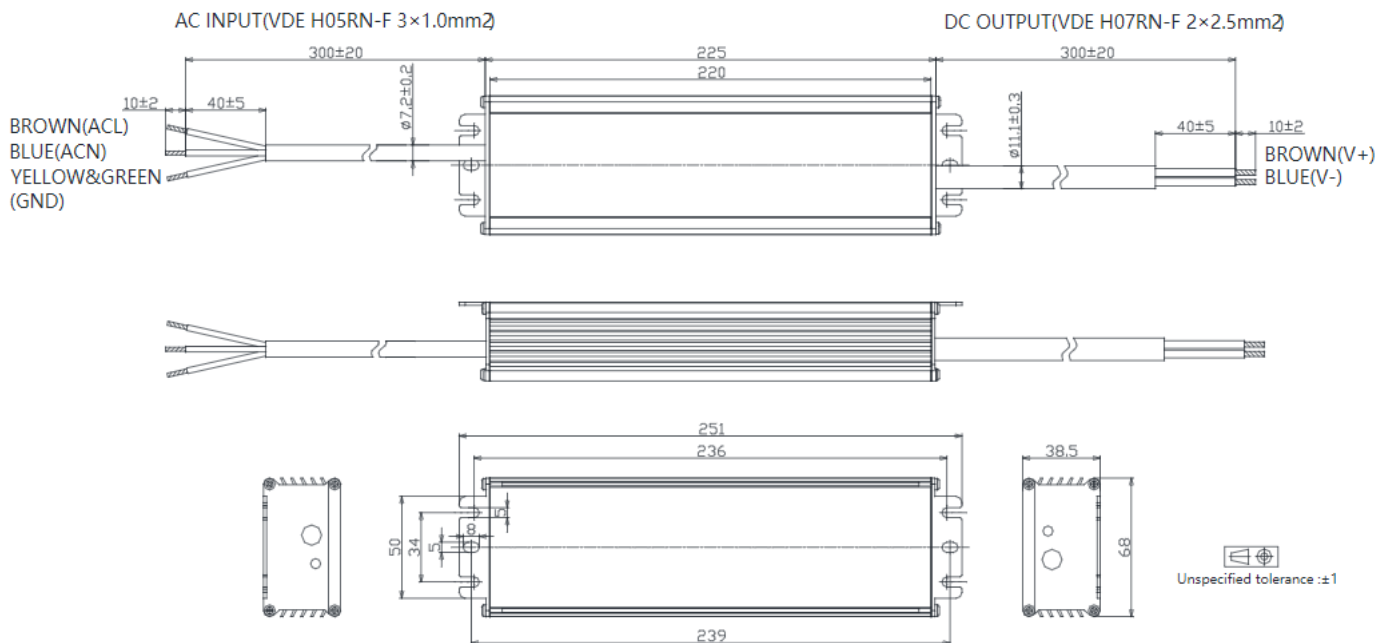


Bright Green Connect PXS-320-V

Mechanical Design

PXS-320-V048-E/EC (48V Model)

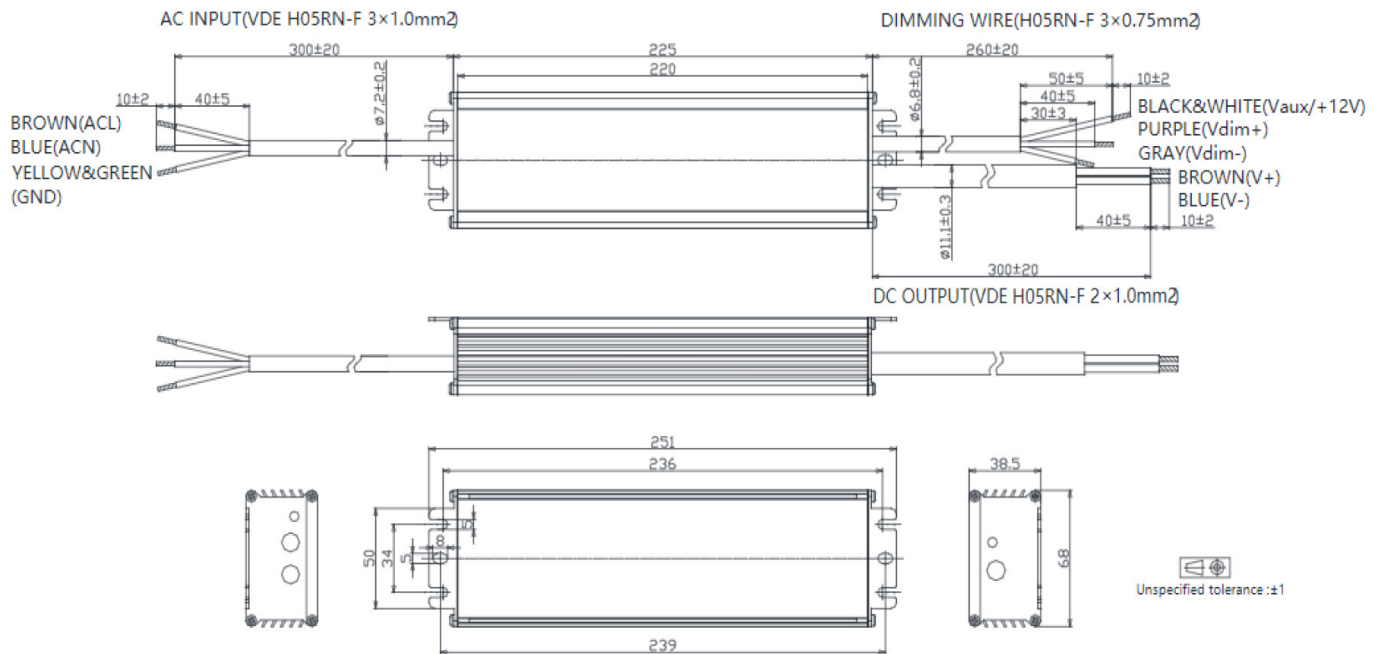


PXS-320-V024-E/EC (24V Model)

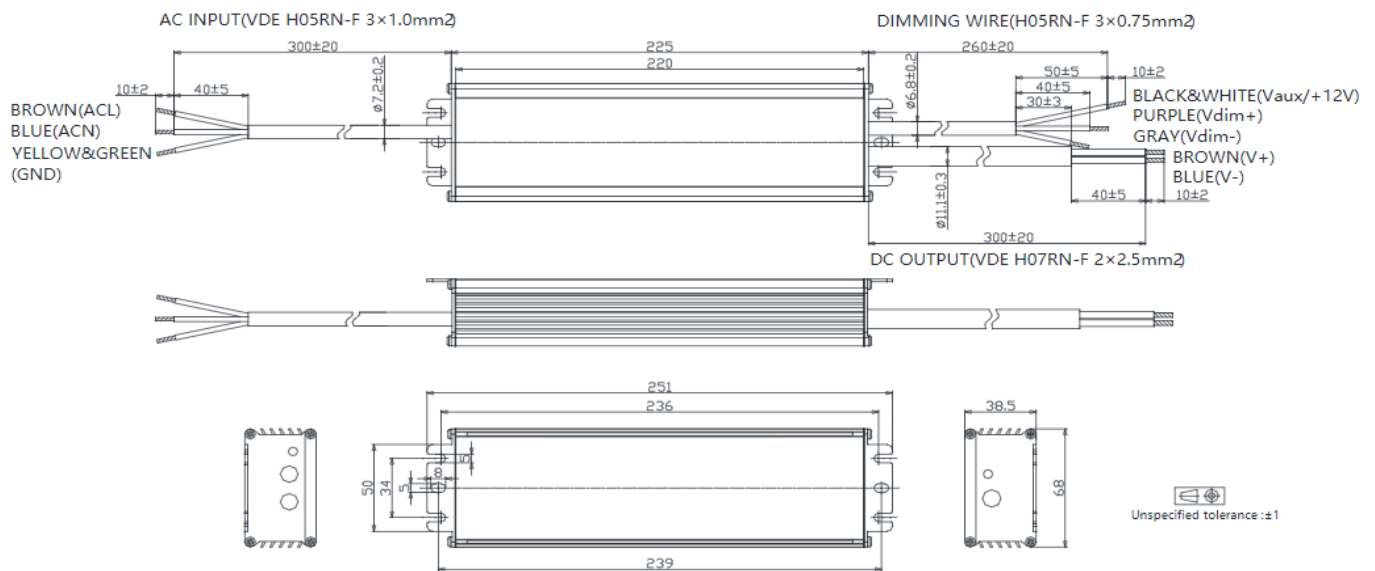


Bright Green Connect PXS-320-V

Mechanical Design

PXS-320-V048-A (48V Model)

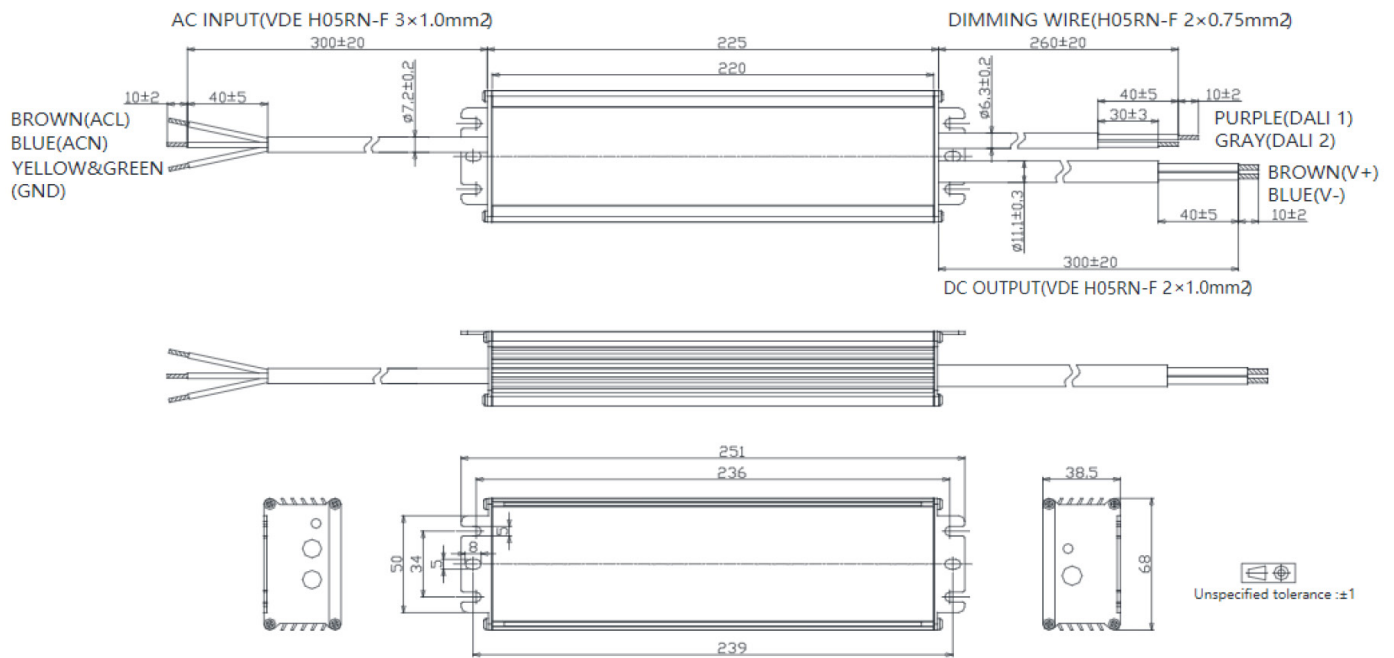


PXS-320-V024-A (24V Models)

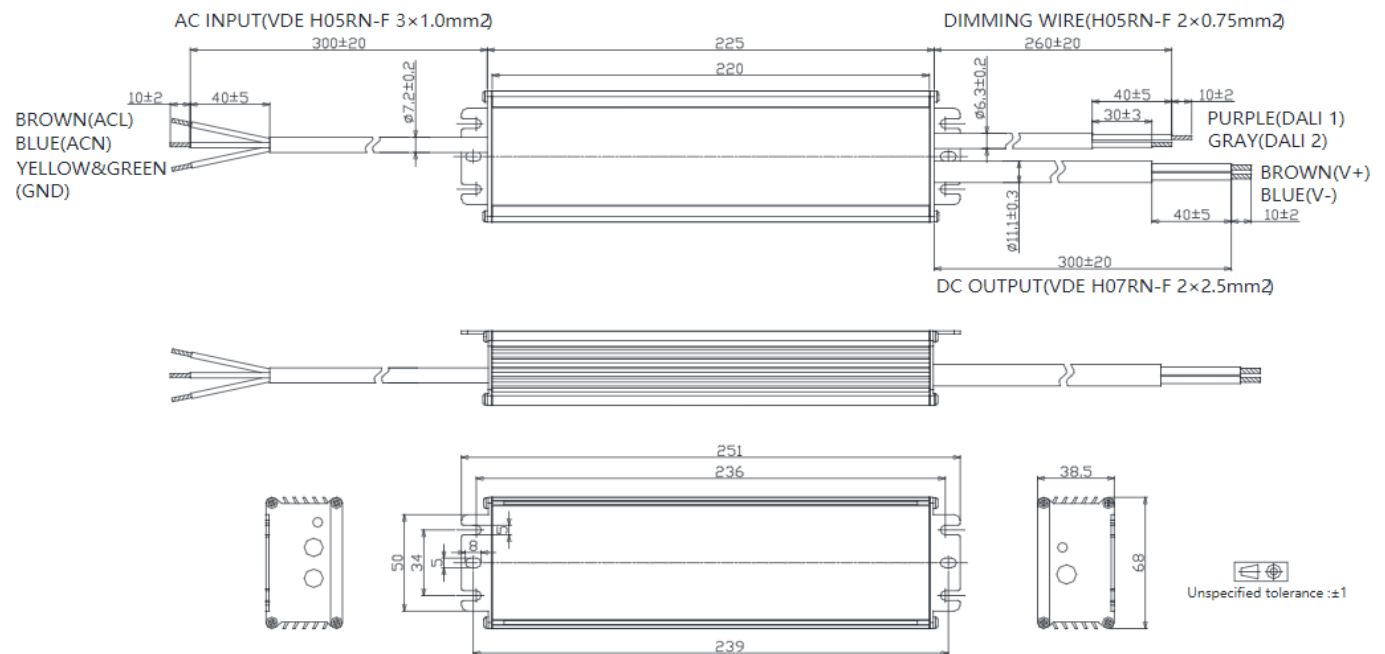

Bright Green Connect PXS-320-V

Mechanical Design

PXS-320-V048-M (48V Model)

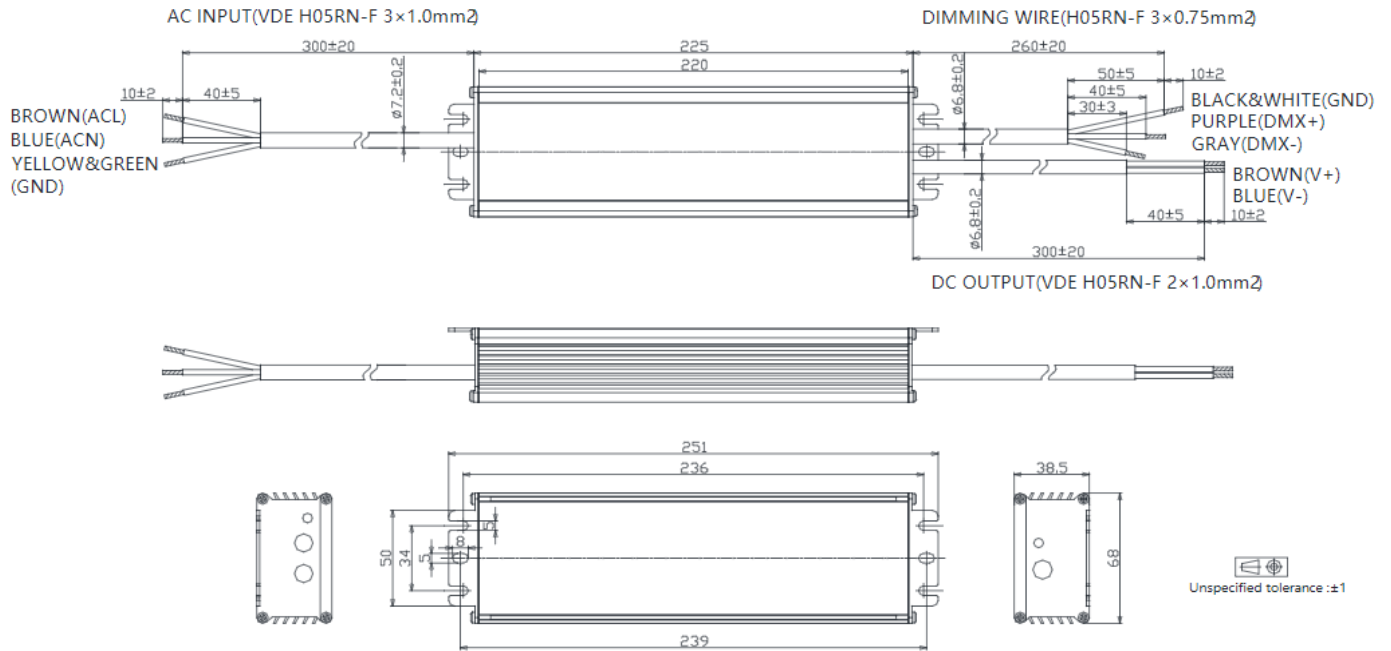

PXS-320-V024-M (24V Models)

