


# Bright Green Dynamic White Colour Guide

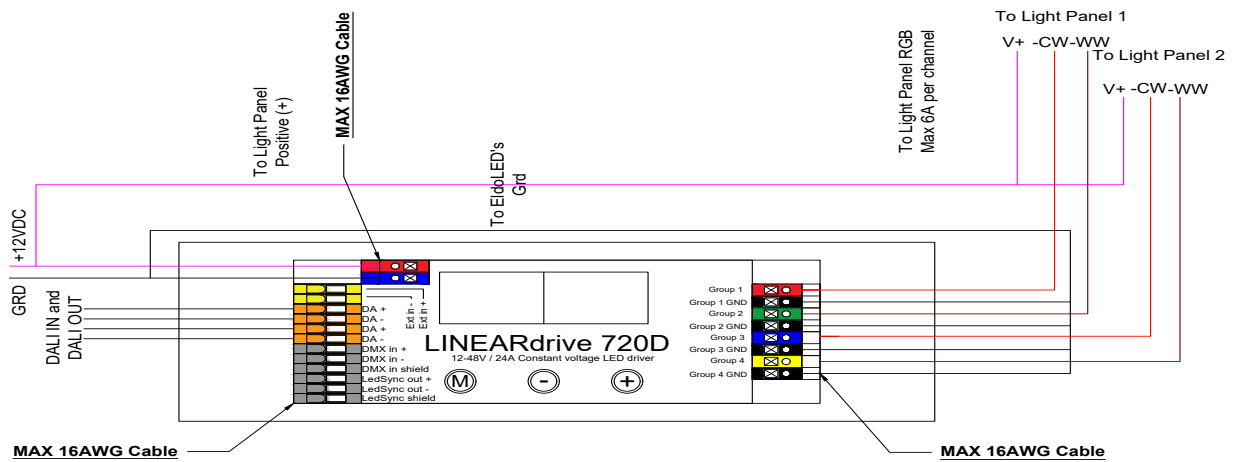

EldoLED configuration with linear dimming curve and white colour mode.

\*A higher resolution version is available, please request a copy stating drawing BGT-EL-141

Estimated values of cool white and warm white for different colour temperatures:

CCT	1.5mm diffuser		3mm diffuser	
	Cool White	Warm White	Cool White	Warm White
3000K	0%	100%	0%	100%
3500K	8%	100%	0%	100%
4000K	43%	100%	36%	100%
4500K	90%	100%	90%	100%
5000K	100%	53%	100%	49%
5500K	100%	22%	100%	20%
6000K	100%	3%	100%	0%
6500K	100%	0%	100%	0%

\*Estimated values only- results may vary depending on panel dimensions, diffusion, environment and project conditions. Tested with a 290 x 210mm light panel.

Tel +44 (0) 1932 355221 Email [info@brightgreentechnology.com](mailto:info@brightgreentechnology.com)

Find out more at [www.brightgreentechnology.com](http://www.brightgreentechnology.com)  
or buy online at [www.brightgreendirect.com](http://www.brightgreendirect.com)

© 2017 Bright Green Technology Limited. V200117

